

PALLET & CARGO
X-RAY IMAGING SYSTEM

XRC 150-165DV (200kV)



XRC 150-165DV x-ray baggage scanner facilitates the operators use thanks to the various image processing functions, hazard alarm, advanced computer technology and the best in class software with its **200kV** generator source. It makes it extraordinarily easy to detect threats such as cutting tools, explosive narcotics and reduces the rate of error. It provides unique image quality by showing the scanned organic, inorganic and mixed items in different colors thanks to its multi-diode structure and quality in imaging of scanned objects.

It is manufactured with **dual view** (DV) technology. Thanks to its 2 generator sources, it provides high resolution and detailed imaging in horizontal and vertical angles. The visuals can be accessed with a single scan without the need to replace the packages in a different orientation. Thus, hidden objects in the luggage are detected more easily and quickly.

It is designed with the latest technology to scan medium and large packages on a pallet. XRC 150-165DV is one of the most suitable solutions for use in high security facilities such as freight companies, terminals, airports, customs and general cargo.

TECHNICAL DATA **XRC 150-165DV (200kV)**

PHYSICAL PROPERTIES

Tunnel Size (W x H)	: 1540 mm x 1660 mm
Dimensions (L x H x W)	: 60,63 in x 65,35 in
Approx. Weight Unpacked	: 8180 mm x 2865 mm x 2505 mm
Conveyor Height	: 322,05 in x 112,80 in x 98,62 in
Conveyor Load Capacity	: ~6100 kg (13448 lbs.)
System Power	: 385 mm (15,16 in)
Conveyor Speed	: 3000 kg (6614 lbs.) Evenly Distributed
	: 110/220V AC ± 10% 50/60 Hz , 10amp max.
	: 0,20 m/sec. Forward or Reverse

X-RAY GENERATOR & IMAGE PERFORMANCE

Steel Penetration ¹	: 50 mm guaranteed; 52 mm typical
Wire Resolution ¹	: 36 AWG guaranteed; 38 AWG typical
Anode Voltage	: 200kV, operating at 200kV
Tube Current	: 1,2 mA
Beam Direction	1st Generator : Vertically downward 2nd Generator : Horizontally sideward
Article Separation	Low Z, Medium Z, High Z to 0,5 Z Accuracy
Cooling	Oil and forced air cooling

COMPUTER SPECIFICATIONS

Processor	: Intel® Core™ i5 (or superior)
Monitor	: Dual 21,5" Flat (or superior)
Memory	: 4 GB RAM (or superior)
Video Card	: 2 GB (or superior)
Hard Drive	: 1 TB (or superior)
USB Port	: 6 port (or superior)
Operating System	: Linux

OPERATING ENVIRONMENT

Storage / Operating Temperature	: -20°C to 50°C / 0°C to 40°C (-4°F to 122°F / 32°F to 104°F)
Relative Humidity	: 10% to 90% non-condensing

HEALTH AND SAFETY

All X-Ray Center Ltd products meet all applicable international health and safety regulations.
 US FDA Federal Standard 21CFR 1020.40
 Health and Safety at Work Act 1974-compliant 6 : Available
 Film Safety : ISO 1600 / 33 DIN
 CE Compliance : Certified
 FCC & IEC Compatibility : Available
 IP 20 Safety : Certified
 Maximum level of radiation the exterior panels come in contact with is 0.1 mR/hour

OPTIONAL FEATURES

Barcode Reader System
 External Camera Archiving
 Remote Viewing Station
 Recheck Station
 Network Supervisory System (NSS)
 Remote Access Connection
 Smart Card Login

OPTIONAL ACCESSORIES


External UPS (For system)
 Operator Console (Open-Closed/Adjustable/I-stand)
 21,5" - 27" Flat Monitor
 Input / Output Rollers
 Test Kit (STP/ASTM)
 Protective Cover
 Search Table
 Tray Return System (Motorized/Gravity)
 Inclined Conveyor
 Ultrasonic Rat Repellent
 Radiation Meter

STANDARD IMAGE PROCESSING FEATURES

Perfect View (Detail Enhancement) (PV)
 Edge Enhancement (EE)
 Pseudo Color (PS)
 Organic Materials (OM)
 Inorganic Materials (IM)
 Black & White (B/W)
 Inverse Colors (IN)
 High Penetration (HP)
 Variable Edge Enhancement (+E -E)
 Variable Density (+D -D)
 Variable Gamma (+G -G)
 Variable Color Separation (+C -C)
 Zoom (64x)
 Sniper Zoom
 Recall Previous Images
 Manual/Automatic Archive
 Annotated Archive
 Multi Energy Viewer (4 - 6 Color)
 Atomic Number Display (Z Value)

STANDARD FEATURES

Programmable Function Keys
 Parcel Counter
 Date and Time Display
 Virtual Threat Image Projection (TIP)
 Organic/Inorganic Threat Alarm
 Operator Training Program (OTP)
 UPS (For Computer Supply)
 Multi Languages
 Self Diagnosis
 Generator Timer
 Automatic Stop Conveyor

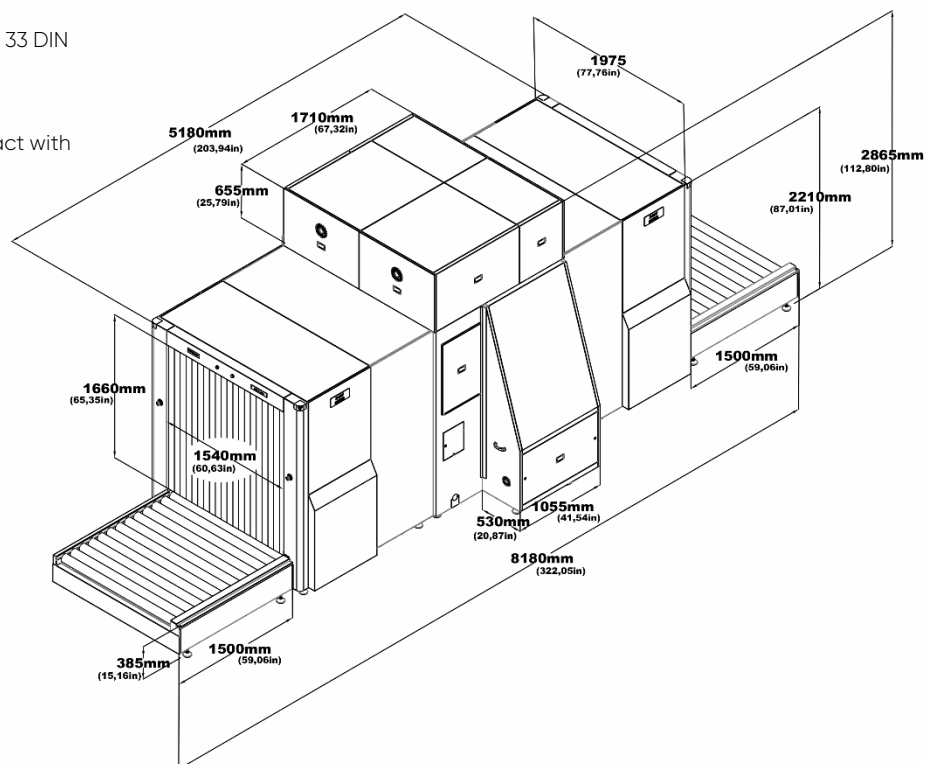

¹As tested on X-Ray Center Ltd. test piece. Conveyor speed is 0.20 m/sec.

Products certified as TSA, ECAC and so on are available as an option. Please inquire from your dealer.
 Due to continuous product development, X-Ray Center reserves the right to change specifications without notice.

