

## SMALL PARCEL & BAGGAGE X-RAY IMAGING SYSTEM

# XRC 60-40



**XRC 60-40** is one of the XRC brand's preferred x-ray devices in terms of its dimensions and functionalities. It facilitates the operators use thanks to the various image processing functions, hazard alarm, advanced computer technology and the best in class software and it is a preferred model for locations with limited operating space. It provides exceptional ease in detecting threats such as cutting tools, explosives narcotics and minimizes the error rate. It provides unique image quality by showing the scanned organic, inorganic and mixed items in different colors thanks to its multi-diode structure and quality in imaging of scanned objects.

X-ray security scanner is designed with the latest technology system to scan small handbags, packages parcels and cabin baggage in detail. Institutions ensure that packages are inspected in places where inspection is required, such as airports, customs border gates, police departments, ministries, prisons, institutions, courts.

# TECHNICAL DATA XRC 60-40

## PHYSICAL PROPERTIES

Tunnel Size	: 610 mm x 440 mm
(W x H)	: 24,02 in x 17,32 in
Dimensions	: 2080 mm x 1370 mm x 870 mm
(L x H x W)	: 81,89 in x 53,94 in x 34,25 in
Approx. Weight Unpacked	: ~540 kg (1190 lbs.)
Conveyor Height	: 810mm (31,89 in) standard (Adjustable height minimum 700mm)
Conveyor Load Capacity	: 200 kg (440 lbs.) Evenly Distributed
System Power	: 110/220V AC $\pm$ 10% 50/60 Hz, 5amp max.
Conveyor Speed	: 0,20 m/sec. Forward or Reverse

## X-RAY GENERATOR & IMAGE PERFORMANCE

Steel Penetration <sup>1</sup>	: 40 mm guaranteed; 42 mm typical
Wire Resolution <sup>1</sup>	: 40 AWG guaranteed; 42 AWG typical
Anode Voltage	: 170kV, operating at 160kV
Tube Current	: 1,0 mA
Beam Direction	: Vertically upward
Article Separation	: Low Z, Medium Z, High Z to 0,5 Z Accuracy Organic, InOrganic, Metallic
Cooling	: Oil and forced air cooling

## COMPUTER SPECIFICATIONS

Processor	: Intel® Core™ i5 (or superior)
Monitor	: 22" Flat LCD Monitor Min.1280x1024 Resolution (or superior)
Memory	: 4 GB RAM (or superior)
Video Card	: 2 GB (or superior)
Hard Drive	: 1 TB (or superior)
USB Port	: 6 port (or superior)
Operating System	: Linux

## OPERATING ENVIRONMENT

Storage / Operating Temperature	: -20°C to 50°C / 0°C to 40°C (-4°F to 122°F / 32°F to 104°F)
Relative Humidity	: 5% to 95% non-condensing
Duty Cycle	100% (24 Hours), No warm-up required

## HEALTH AND SAFETY

All X-Ray Center Ltd products meet all applicable international health and safety regulations.  
 US FDA Federal Standard 21CFR 1020.40  
 Health and Safety at Work Act 1974-compliant 6 : Available  
 Film Safety : ISO 1600 / 33 DIN  
 CE Compliance : Certified  
 FCC & IEC Compatibility : Available  
 IP 20 Safety : Certified  
 Maximum level of radiation the exterior panels come in contact with is 0.1 mR/hour

## OPTIONAL FEATURES

Barcode Reader System  
 External Camera Archiving  
 Remote Viewing Station  
 Recheck Station  
 Network Supervisory System (NSS)  
 Remote Access Connection  
 Smart Card Login

## OPTIONAL ACCESSORIES


External UPS (For system)  
 Operator Console (Open-Closed/Adjustable/I-stand)  
 21,5" - 27" Flat Monitor  
 Input / Output Rollers  
 Test Kit (STP/ASTM)  
 Protective Cover  
 Search Table  
 Tray Return System (Motorized/Gravity)  
 Inclined Conveyor  
 Ultrasonic Rat Repellent  
 Radiation Meter

## STANDARD IMAGE PROCESSING FEATURES

Perfect View (Detail Enhancement) (PV)  
 Edge Enhancement (EE)  
 Pseudo Color (PS)  
 Organic Materials (OM)  
 Inorganic Materials (IM)  
 Black & White (B/W)  
 Inverse Colors (IN)  
 High Penetration (HP)  
 Variable Edge Enhancement (+E -E)  
 Variable Density (+D -D)  
 Variable Gamma (+G -G)  
 Variable Color Separation (+C -C)  
 Zoom (64x)  
 Sniper Zoom  
 Recall Previous Images  
 Manual/Automatic Archive  
 Annotated Archive  
 Multi Energy Viewer (4 - 6 Color)  
 Atomic Number Display (Z Value)

## STANDARD FEATURES

Programmable Function Keys  
 Parcel Counter  
 Date and Time Display  
 Virtual Threat Image Projection (TIP)  
 Organic/Inorganic Threat Alarm  
 Operator Training Program (OTP)  
 UPS (For Computer Supply)  
 Multi Languages  
 Self Diagnosis  
 Generator Timer  
 Bi-Directional Scanning  
 Automatic Stop Conveyor  
 Emergency Stop Buttons

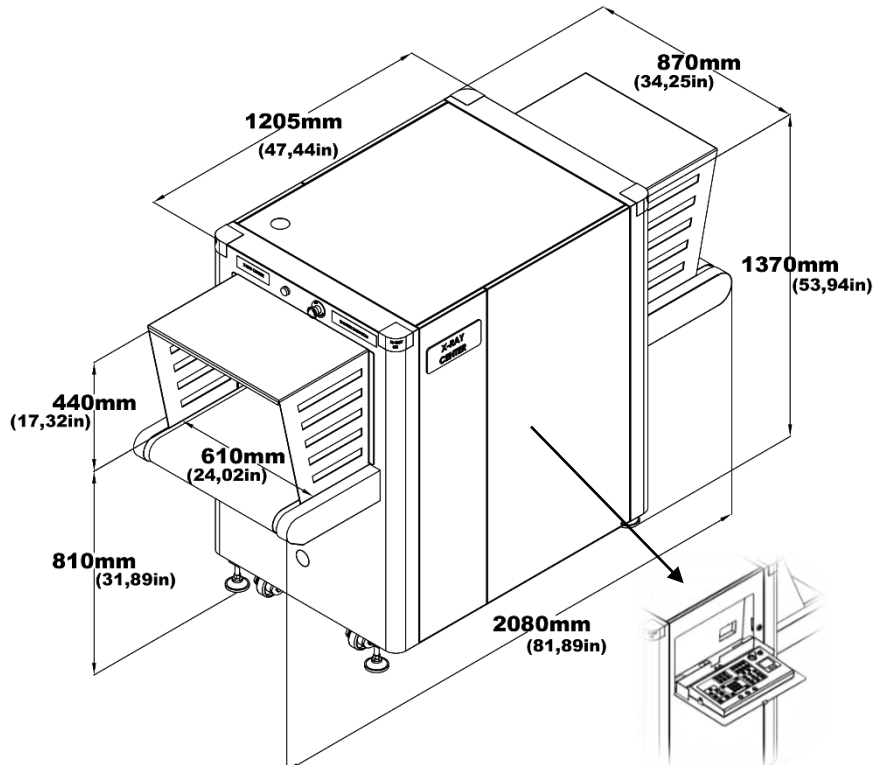

The keyboard can be produced optionally as integrated into the device.

<sup>1</sup>As tested on X-Ray Center Ltd. test piece. Conveyor speed is 0.20 m/sec.  
 Products certified as TSA, ECAC and so on are available as an option. Please inquire from your dealer.  
 Due to continuous product development, X-Ray Center reserves the right to change specifications without notice.

